

EOS InfraTec Classic


Electronic control unit for infrared warming cabins.

- Casing: Built-in unit for flush mounting
- Control buttons: Switches as membrane keyboard on / off as rocker switch.
- Control: electronically via KTY-Sensor and safety temperature limiter 139 °C
- Heating time shut-off: 1 - 99 minutes
- Completely premounted with connecting cable and earthing pin plug, 3-pole silicone cable for cabin lighting as well as connecting cable for the IR heating lamp.

! Only IR radiant heaters or IR heating foils act. EN 60335-1 and EN 60335-2-53 may be connected.




Connection diagram

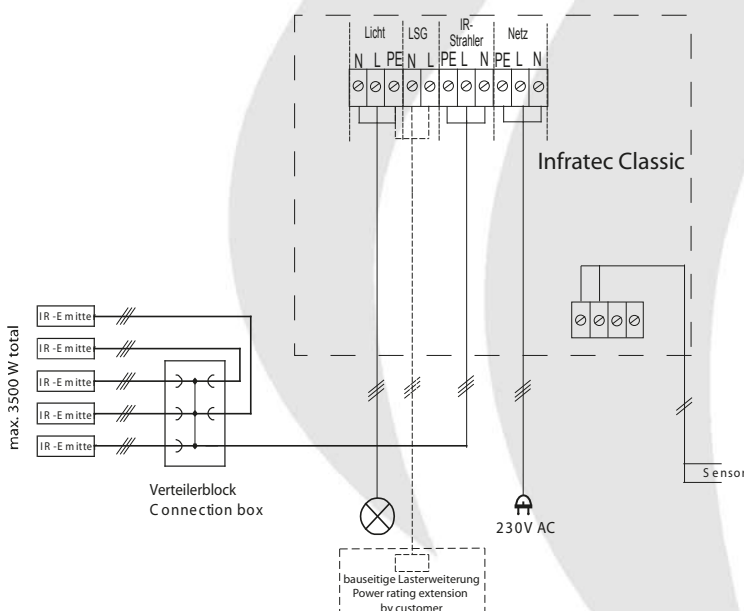


CE EAC IPx4 MADE IN GERMANY

Installation cut-out



Installation example



Art. No.	Electrical connection/ power	Fuse	Heating time shut-off	Control range	Dimensions H/W/D	Environmental temperature	Weight without package approx.	premounted wiring
94.4334	230 V N AC 50 Hz max. 3,5 kW	16 A	1 - 99 Min.	30 - 70 °C	139 x 194 x 49 mm	0 bis 40° C	1,0 kg	yes
94.4388								no