

# Metra Display ISO

## Technical Data Sheet

Manufacturer:	Metra inženiring d.o.o. IOC Trzin Špruha 19 SI-1236 Trzin, Slovenia	phone: +386 1 56 10 740 fax: +386 1 56 10 744 web: <a href="http://www.metra.si">www.metra.si</a>
Trade Mark:	Metra MEW System	
Model/Type ref.:	Metra Display ISO	
Part Number:	1399	
Contains FCC ID:	2ABT80005P939	
Year of Construction:	2016 - 2018	


### 1. PRODUCT DESCRIPTION



Metra Display ISO is a user interface device for Metra electronic locking systems. It reads ISO 15693, ISO 14443A, ISO 14443B and Mifare compatible RFID media as locker keys and displays the locker number on a four digit LED display. Integrated 12 key washable keypad enables additional user interaction (PIN code, locker number, etc.) and can be used for locking / unlocking instead of RFID media. It also signals a locker brake-in alarm.

It can be assigned to as many lockers as convenient, depending on the Locker Controller application, locker design and floor plan configuration.

## 2. TECHNICAL DATA

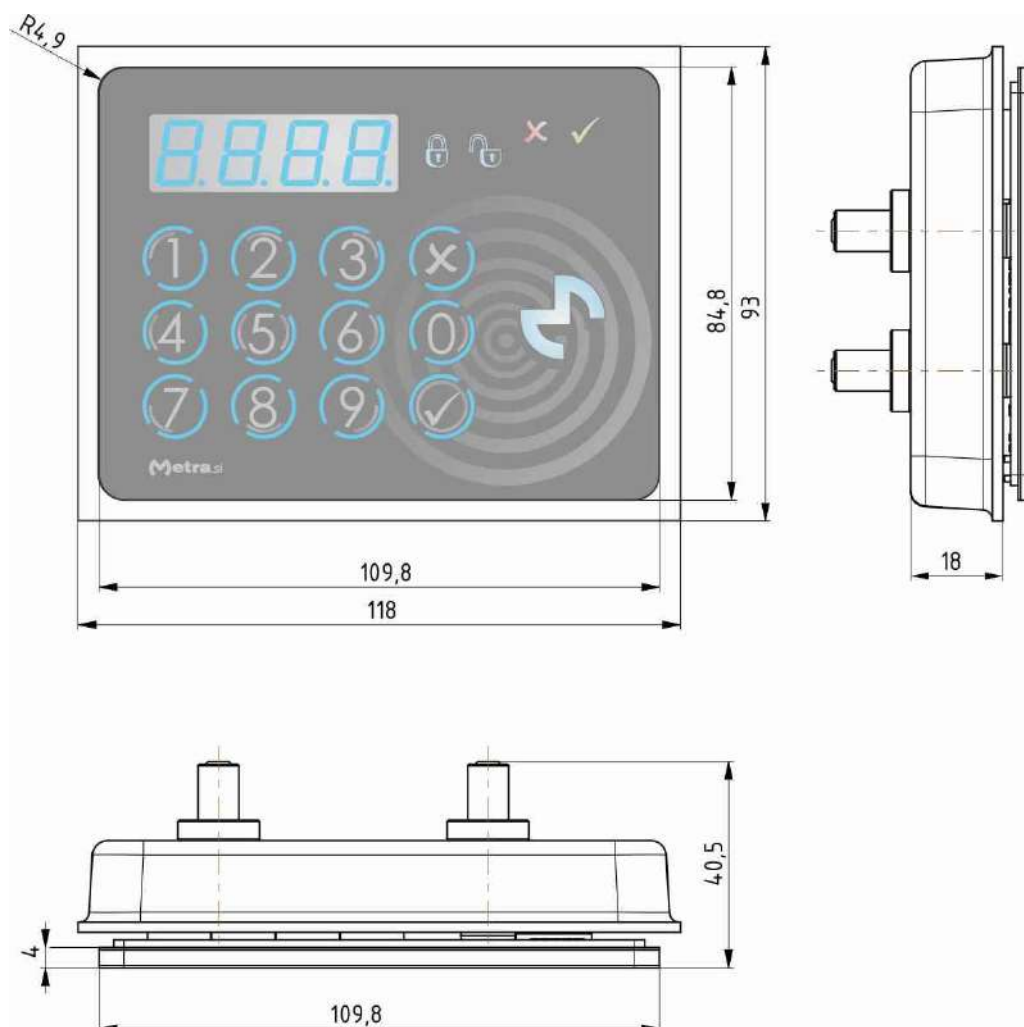

Operating voltage	12V DC – powered over MEW Connection. No Power Supply needed.
Current consumption	0.15A average / 0.35A max
Average Power consumption	43 Wh/day (usage/standby = 1/4)
Operating temperature range	0 to +50 °C
Audio signalization	integrated piezoelectric beeper
Visual signalization	4-Digit LED display with 4 additional LEDs and a Metra blinking Logo
RFID Antenna	Passive antenna tuned to 13.56 MHz.
Built-in RFID reader	Reads ISO 15693, ISO 14443A, ISO 14443B and Mifare compatible RFID media
Connections	2 x Metra MEW
Dimensions in mm (w/h/l)	110/85